

New: Protective Coating Electra 92 (AR-PC 5092)


Conductive protective coating for polymer and novolac-based resists

Top layer for the dissipation of e-beam charges on insulating substrates

Characterisation

- as protective coating, this resist is not sensitive to light / radiation
- thin, conductive layers for the dissipation of charges during electron exposure
- coating of PMMA, CSAR 62, Novolac, Medusa 82 et al.
- longterm-stable
- easy removal with water after exposure
- polyaniline-derivative dissolved in water

Conductivity

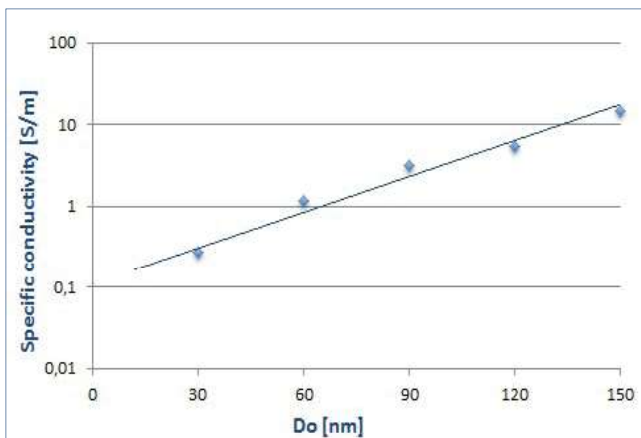

Conductivity measurements of AR-PC 5092 layers obtained after spin deposition. For thinner films, the resistance increases and the conductivity decreases.

Properties I

| Parameter / AR-PC | 5092.02 |
|------------------------------|---------|
| Solids content (%) | 2 |
| Viscosity 25°C (mPas) | 1 |
| Film thickness/4000 rpm (nm) | 42 |
| Film thickness/1000 rpm (nm) | 100 |
| Resolution (µm) / Contrast | - |
| Storage temperature (°C) * | 8 - 12 |

* Products have a guaranteed shelf life of 6 months from the date of sale if stored correctly and can also be used without guarantee until the date indicated on the label.

Properties II


| | |
|--------------------------------------|-----|
| Conductivity in layer 60 nm (S/m) | 1.2 |
|--------------------------------------|-----|

REM dissipation of charges



200 nm-squares written on quartz without distortion caused by charges with AR-P 662.04 and Electra 92

REM dissipation of charges

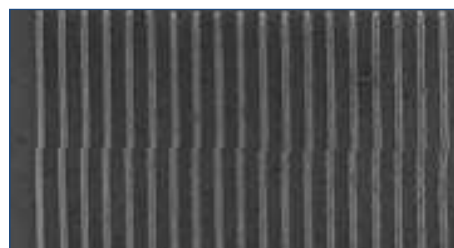

50 nm lines written on glass at a pitch of 150 nm with AR-N 7520.07 and Electra 92

Process parameters

| | |
|-----------|----------------------------------|
| Substrate | 4" wafer quartz with AR-P 662.04 |
| Coating | 2000 rpm, 60 nm |
| Soft bake | 85 °C |










Process chemicals

| | |
|-------------------|----------|
| Adhesion promoter | - |
| Developer | - |
| Thinner | - |
| Remover | DI-water |

New: Protective Coating Electra 92 (AR-PC 5092)

Process conditions

This diagram shows exemplary process steps for resist Electra 92 - AR-PC 5092.02 and PMMA-resist AR-P 662.04. All specifications are guideline values which have to be adapted to own specific conditions.

| | | |
|---|---|---|
| 1. Coating |  | AR-P 662.04 on insulating substrates (quartz, glass, GaAs) 4000 rpm, 60 s, 140 nm |
| 1. Soft bake ($\pm 1\text{ }^{\circ}\text{C}$) |  | 150 $^{\circ}\text{C}$, 2 min hot plate or 150 $^{\circ}\text{C}$, 30 min convection oven |
| 2. Coating |  | AR-PC 5092.02 2000 rpm, 60 s, 60 nm |
| 2. Tempering ($\pm 1\text{ }^{\circ}\text{C}$) |  | 90 $^{\circ}\text{C}$, 2 min hot plate or 85 $^{\circ}\text{C}$, 25 min convection oven |
| E-beam exposure |  | ZBA 21, 20 kV Exposure dose (E_0): 110 $\mu\text{C}/\text{cm}^2$ (AR-P 662.04, 140 nm) |
| Removal |  | AR-PC 5092.02 DI-water, 60 s |
| Development (21-23 $^{\circ}\text{C} \pm 0.5\text{ }^{\circ}\text{C}$) puddle |  | AR-P 662.04 AR 600-56, 2 min AR 600-60, 30 s |
| Stop | | |
| Post-bake (optional) |  | 130 $^{\circ}\text{C}$, 1 min hot plate or 130 $^{\circ}\text{C}$, 25 min convection oven for slightly enhanced plasma etching stability |
| Customer-specific technologies |  | Generation of e.g. semi-conductor properties, etching, sputtering |
| Removal |  | AR 600-71 or O_2 plasma ashing |

Processing instructions


The conductivity may be varied by adjusting the thickness with different rotational speeds. Thicker layers of 90 nm thus have a 2.5 times higher conductivity as compared to 60 nm thick layers.

For the build-up of an even conductive layer, the substrate should be wetted with the resist solution before the spin process is started.

Protective Coating Electra 92

Application examples for Electra 92

Conductivity Electra 92 as a function of Temperature

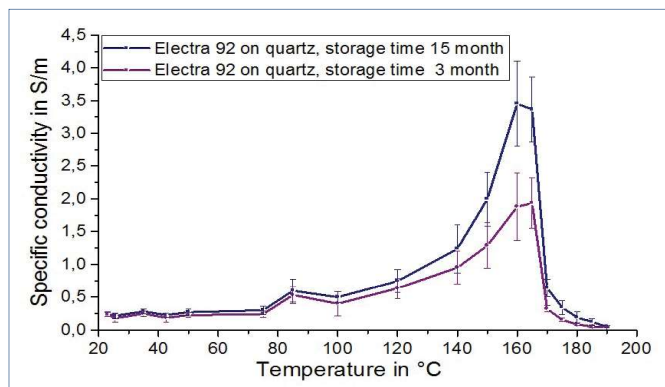


Conductivity properties of differently aged Electra 92 batches

The conductivity was determined as a function of the measured temperature. At temperatures < 100 °C, both resists show a virtually identical conductivity.

Conductivity measurements up to a temperature of 160 °C which were performed directly on a hotplate showed a large increase of the conductivity by a factor of 10 (see diagram). This fact is due to the complete removal of water from the layer. After a few hours of air humidity absorption under room conditions, the conductivity decreases again to the initial value. In the high vacuum of e-beam devices, the water is also completely removed and the conductivity thus increases accordingly. This effect has been demonstrated in direct conductivity measurements under mediate vacuum conditions. Temperatures above 165 °C destroy the polyaniline irreversibly and no conductivity is observed any more.

CSAR 62 on glass with Electra 92 for deriving

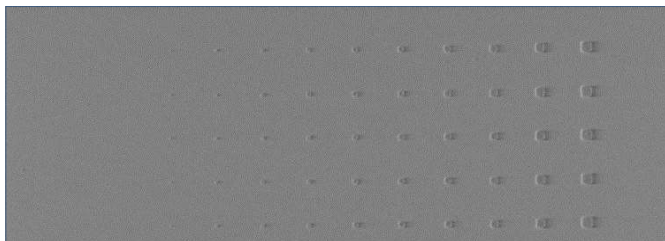

30 – 150 nm squares of CSAR 62 on glass

The combination of CSAR 62 with Electra 92 offers the best options to realise complex e-beam structuring processes on glass or semi-insulating substrates like e.g. gallium arsenide. The excellent sensitivity and highest resolution of the CSAR are complemented harmoniously by the conductivity of Electra 92.

CSAR 62 and Electra 92 on glass

| | |
|------------------------|--|
| Substrate | Glas 24 x 24 mm |
| Adhesion AR 300-80 | 4000 rpm; 10 min, 180 °C hot plate |
| Coating AR-P 6200.09 | 4000 rpm; 8 min, 150 °C hot plate |
| Copating AR-PC 5092.02 | 4000 rpm; 5 min, 105 °C hot plate |
| E-beam-irradiation | Raith Pioneer; 30 kV, 75 $\mu\text{C}/\text{cm}^2$ |
| Removal Electra 92 | 2 x 30 s water, dipping bath |
| Bath (drying) | 30 s AR 600-60 |
| Development CSAR 62 | 60 s AR 600-546 |
| Stopping | 30 s AR 600-60 |

At a CSAR 62 film thickness of 200 nm, squares with an edge length of 30 nm could reliably be resolved on glass.

PMMA Lift-off on glass with Electra 92



200 nm squares produced with 2-layer PMMA lift-off

Initially, the PMMA resist AR-P 669.04 (200 nm thickness) was coated on a quartz substrate and tempered. The second PMMA resist AR-P 679.03 was then applied (150 nm thickness) and tempered, followed by coating with Electra 92. After exposure, Electra 92 was removed with water, the PMMA structures were developed (AR 600-56) and the substrate vaporised with titanium/gold. After a liftoff with acetone, the desired squares remained on the glass with high precision.


PMMA-Lift-off auf Glas mit Electra 92

| | |
|-----------------------|--|
| Substrate | Glas 25 x 25 mm |
| Coating AR-P 669.04 | 4000 rpm; 3 min, 150 °C hot plate |
| Coating AR-P 679.03 | 4000 rpm; 3 min, 150 °C hot plate |
| Coating AR-PC 5092.02 | 2500 rpm; 5 min, 105 °C hot plate |
| E-beam irradiation | Raith Pioneer; 30 kV, 75 $\mu\text{C}/\text{cm}^2$ |
| Removal Electra 92 | 2 x 30 s water |
| Development PMMAs | 60 s AR 600-56 |
| Stopping | 30 s AR 600-60 |
| Steaming | titanium/gold |

Protective Coating Electra 92


Application examples for Electra 92

Lift-off structures on garnet

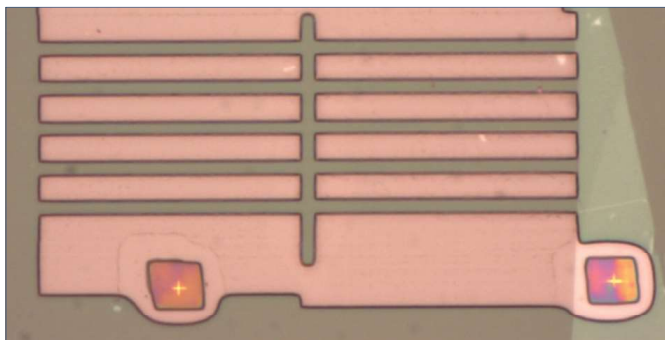

Lift-off structures on garnet (University of California, Riverside, Department of Physics and Astronomy)


Plasmonic structures on quartz

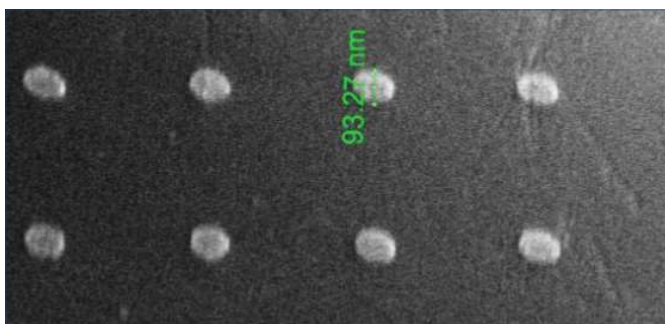

Silver nanoparticles on quartz, generated with AR-P 672.11 and Electra 92 (Aarhus University, Denmark)

Application examples for Novolac Electra 92

Electra 92 and AR-N 7700 on glass

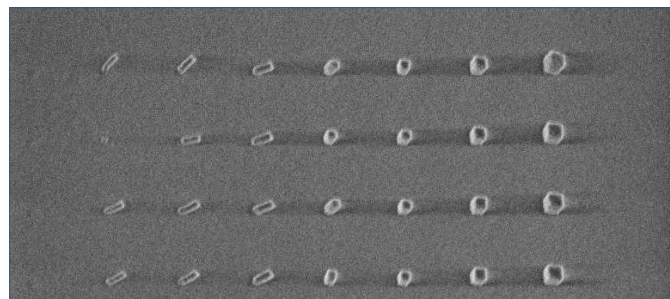


60 – 150 nm squares (100 nm height) on glass with AR-N 7700.08 and Electra 92

Novolac-based e-beam resists possess other surface properties than CSAR 62 or PMMA. E-beam resist AR-N 7700.08 was at first spincoated on glass, dried, coated with Electra 92 and baked at 50 °C. After irradiation, the Electra layer was removed within 1 minute with water

and the e-beam resist then developed. The resulting resolution of 60 nm is very high for chemically amplified resists.

On highly insulating substrates for SEM applications

Electrostatic surface charges caused by a deflection of the incident electron beam can be extremely disturbing and interfere with a correct imaging. To avoid this effect, e.g. gold is evaporated onto the sample which however also entails disadvantages since some structures change irreversibly due to thermal effects. Studies demonstrated that the conductive coating Electra 92 can be used as alternative. The coating on electrically highly insulating polymers or glass also enables high-quality images of nanostructures in SEM:

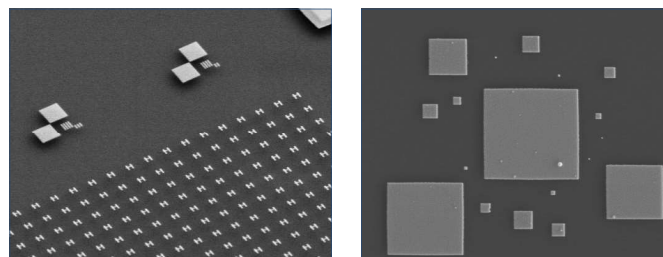

SEM images: Highly insulating polymer structures coated with Electra 92

After SEM investigation, the conductive coating was completely removed with water, and structures could still be used further.